


高压方块球阀

JBP 系列 (Ball valve)

技术参数:

- 1、最大工作压力可大: 690bar (10000psig)。
- 2、工作温度范围: -40°C 至 232°C (-40° F 至 450° F)。
- 3、两通阀门可双向流动。
- 4、浮动球结构补偿阀门磨损。
- 5、多种端口接头类型可供选择。
- 6、防飞出阀杆结构。
- 7、手柄颜色可供选择。
- 8、阀门连接可以和气动执行器配对使用。
- 9、每个阀门在工厂进行 6000psig 的氮气气密实验测试, 确保阀们无泄漏。
- 10、每个阀门都按照 J-LOK 检验标准 检验。

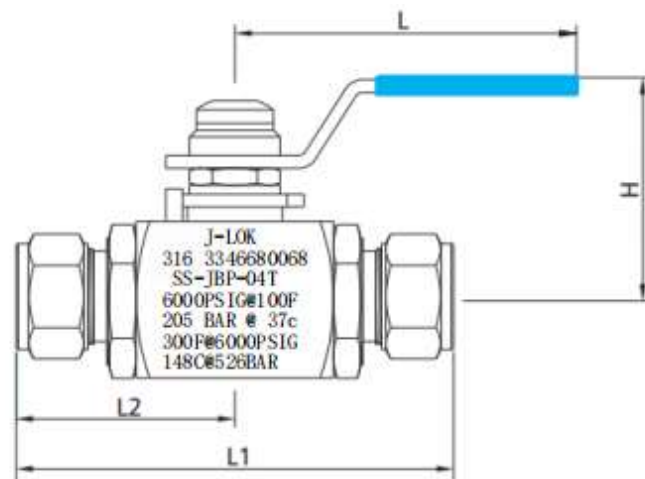

技术及尺寸参数：

基本订购信息	端口类型		内通径 I _n mm	CV	尺寸 in (mm)									
	端口 1	端口 2			A	B	X	Y	S					
JBP-06MM	6mm J-LOK	6mm J-LOK	0.39 (10.0)	1.2	3.54	1.77	5.12 130.0	1.73 44.0	1.30 32.0					
JBP-08MM	8mm J-LOK	8mm J-LOK			90.0	45.0								
JBP-010MM	10mm J-LOK	10mm J-LOK		3.7	3.70	1.85								
JBP-12MM	12mm J-LOK	12mm J-LOK		7.5	94.0	47.0								
JBP-14MM	14mm J-LOK	14mm J-LOK			3.94	1.97								
JBP-04T	1/4" J-LOK	1/4" J-LOK		1.2	3.60	1.80								
JBP-06T	3/8" J-LOK	3/8" J-LOK		3.7	9.16	45.8								
JBP-08T	1/2" J-LOK	1/2" J-LOK		7.5	3.72	1.86								
JBP-04NF	1/4NPT 阴螺 纹	1/4NPT 阴螺 纹			99.6	49.8								
JBP-06NF	3/8NPT 阴螺 纹	3/8NPT 阴螺 纹			3.92	1.96								
JBP-08NF	1/2NPT 阴螺 纹	1/2NPT 阴螺 纹			2.52	1.26								
JBP-04NM	1/4NPT 阳螺 纹	1/4NPT 阳螺 纹		3.7	64.0	32.0								
JBP-06NM	3/8NPT 阳螺 纹	3/8NPT 阳螺 纹			2.80	1.40								
JBP-08NM	1/2NPT 阳螺 纹	1/2NPT 阳螺 纹		7.5	71.0	35.5								
JBP-16MM	16mm J-LOK	16mm J-LOK			3.11	1.56								
JBP-18MM	18mm J-LOK	18mm J-LOK		3.7	79.0	39.5								
JBP-20MM	20mm J-LOK	20mm J-LOK	33.6		1.68									
JBP-22MM	22mm J-LOK	22mm J-LOK	7.5	85.4	42.7									
JBP-10T	5/8" J-LOK	5/8" J-LOK		3.75	1.88									
JBP-12T	3/4" J-LOK	3/4" J-LOK	7.5	95.2	47.6									
JBP-08PTF	1/2BSPT 阴 螺 纹	1/2BSPT 阴螺 纹		3.75	1.88									
JBP-12NF	3/4NPT 阴螺 纹	3/4NPT 阴螺 纹	7.5	95.2	47.6									
JBP-12NM	3/4NPT 阳螺 纹	3/4NPT 阳螺 纹		3.75	1.88									
JBP-25MM	25mm J-LOK	25mm J-LOK	0.5 12.7	10.0	4.04	2.02	5.71 145.0	1.89 48.0	1.50 38.0					
JBP-16T	1" J-LOK	1" J-LOK			4.12	2.06								
JBP-12PTF	3/4BSPT 阴 螺 纹	3/4BSPT 阴螺 纹			104.6	52.3								
JBP-16NF	1 NPT 阴螺 纹	1 NPT 阴螺 纹			4.43	2.22								
JBP-12PTF	3/4 BSPT 阳 螺 纹	3/4 BSPT 阳螺 纹			112.6	56.3								
JBP-16NM	1 NPT 阳螺 纹	1 NPT 阳螺 纹			4.36	2.18								
JBP-16T	1" J-LOK	1" J-LOK			110.6	55.3								
JBP-12PTF	3/4 BSPT 阳 螺 纹	3/4 BSPT 阳螺 纹			3.54	1.77								
JBP-16NF	1 NPT 阴螺 纹	1 NPT 阴螺 纹			90.0	45.0								
JBP-12PTF	3/4 BSPT 阳 螺 纹	3/4 BSPT 阳螺 纹			4.14	2.07								
JBP-16NM	1 NPT 阳螺 纹	1 NPT 阳螺 纹			105.2	52.6								
JBP-16T	1" J-LOK	1" J-LOK			0.7 18.0	30.0				5.11	2.66	6.30 160.0	2.08 53.0	1.96 50.0
JBP-12PTF	3/4BSPT 阴 螺 纹	3/4BSPT 阴螺 纹								5.11	2.66			
JBP-16NF	1 NPT 阴螺 纹	1 NPT 阴螺 纹			0.7 18.0	30.0				129.8	64.9			
JBP-12PTF	3/4 BSPT 阳 螺 纹	3/4 BSPT 阳螺 纹								3.54	1.77			
JBP-16NM	1 NPT 阳螺 纹	1 NPT 阳螺 纹			0.7 18.0	30.0				90.0	45.0			
JBP-16T	1" J-LOK	1" J-LOK	3.86	1.93										
JBP-12PTF	3/4 BSPT 阳 螺 纹	3/4 BSPT 阳螺 纹	19.0	30.0	98.2	49.1								
JBP-16NF	1 NPT 阴螺 纹	1 NPT 阴螺 纹			4.54	2.27								
JBP-16NM	1 NPT 阳螺 纹	1 NPT 阳螺 纹	30.0	30.0	115.2	57.6								
JBP-16T	1" J-LOK	1" J-LOK			4.91	2.45								
JBP-12PTF	3/4 BSPT 阳 螺 纹	3/4 BSPT 阳螺 纹	30.0	30.0	124.8	62.4								
JBP-16NF	1 NPT 阴螺 纹	1 NPT 阴螺 纹			4.91	2.45								